

# PREVENT DAMAGE

The Perfect Safeguard for Every Home

# DRIPTITE™

## Combo Washer & Dryer Pan

### UNBREAKABLE



**#1 Seller in the U.S.**

Ideal for 2nd Floor Laundry Rooms!  
*Protects from Overflows.*

*Specially Designed & Patented*  
To Fit All Combination  
Washer & Dryers With or  
Without Pedestal Drawers

- **WILL NOT BREAK**
- **LIFE-LONG TOUGH**
- **Up to 4X thicker for superior strength**
- Won't bend or rust like metal pans
- Protects from leaky dryer steam feature
- Textured surface prevents W/D shifting
- Allows for swapping of washer & dryer positions and door swing changes
- Rounded corners for child safety
- Won't break when stepped on!
- Protects floors from scuffing
- Translucent for easy drain hole drilling
- **10 Year NoBreak NoCrack Warranty**


## Tested TruTough Made to Last!




**MADE IN  
U.S.A  
PRODUCT**

# 10 Year Warranty!

Protected by U.S. Patent # 8,393,351 B2

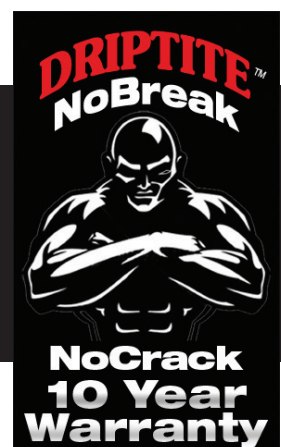


Manufactured by DRIPTITE • Office: (949) 842-2387 • email: frankcarter@driptide.com  
West Coast Distribution location • 16404 Knott Ave., La Mirada, CA 90638  
Midwest Distribution location • 4920 State Road, Ashtabula, OH 44004



6 51536 39435 6

## DRIPTITE Combo Washer & Dryer Pan Installation Instructions:

1. Drill a 1-1/4" diameter hole in the bottom of Combo Washer & Dryer pan, where the drain hole in floor is located. You will be able to see it through the pan because the pan is translucent.
2. Place drain fitting through drilled hole from back side of tray
3. On top side of tray place washer over drain fitting and tighten locknut over washer
4. Position tray where it will be placed and connect fitting to drain pipe
5. Set center of tray and complete washing machine and dryer installation - side by side.




# DRIPTITE™

## Combination Washer & Dryer Pan

### Installation Recommendations:

Always raise leveler legs on XL top-loading washers by 1" before installing your washing machine. Also, washing machine leveler legs may need to be raised to allow for pedestal drawer to completely open and extend.



Locate the drain hole that can be seen through pan. This is where you mark the hole to drill and install the drain fitting.

(Washer or Dryer)

(Washer or Dryer)



**Installation Note:** If pan is slightly 'bowed' from stacking, flip pan over to the opposite side of the bow (on a flat surface) and let sit for 15 min. before installing. This will remove bowing and flatten pan to normal.

**To Clean:** Pan can easily be cleaned with any household cleaning solvent.

### DRIPTITE 10 (ten) Year NoBreak NoCrack Warranty

If your DRIPTITE Washer & Dryer Pan (part) fails because of a manufacturing defect within 10 (ten) years from the date of purchase, we will provide a new part at our option, without charge. Return the defective part directly back to the A/P Office (Driptite, 25422 Trabuco Rd., Suite 105-622, Lake Forest, CA 92630) with a copy of the "proof of purchase". If the part is defective, it will be exchanged. This warranty does not cover parts that are improperly installed, damaged, abused or used for other than the intended purpose. It does not include the cost of returning the part to the vendor from which it was purchased, the labor to remove, install or diagnose the failure, parts used in the commercial applications, and incidental or consequential damage caused by possible defects with the parts.

**Disclaimer:** This product is not intended to prevent serious flooding from Washer or Dryer malfunction. It is designed to handle drips, leaks and overflows that occur with normal usage. Please retain original shipping box until you know the pan fits and you are keeping the pan, in case of return.